Collomix



BUILDING SHELL TECHNOLOGY





Rotary mixer POX-S

For mixing small volumes with ease



- Handy and portable mixers with a permanently fixed mixing mechanism and rotating mixing tub
- Mixing action via rotating tub
- Edge and bottom scraper prevents sediment collecting on the edges of the container
- Compact design and light weight allow high labor mobility
- For the bucket transportation a dolly is available as accessory
- Suitable for compact and plastic mortar, screed, plaster with aggregate and lean concrete
- The practical helper for mason, composition floor layer, garden designers and landscapers, renovators

Screed



Plaster



Drainage mortar



Universal mortar




Concrete



Synthetic resin screed



Material (weight without added water):	РОХ
Slightly moist concrete with grain size of -8 mm (30 l)	+
Concrete with max. grain size of 8 mm (30 l)	+
Cement screed (35 I)	+
Universal mortar (40 l)	+
Synthetic resin screed	+
Light wall mortar (25 l)	+
Cement stucco (40 l)	+
Gypsum plaster (40 l)	-
Loam plaster without fiber (40 l)	-
Heat-insulating plaster (30 l)	+
Mortar for natural stone slabs (30 l)	+
2-component slab pointing mortar (-1,2 mm, 30 l)	+
Middle-bed mortar (25 l)	-
Tile adhesives (flexible mortar, 25 l)	-
Pointing mortar (25 l)	-
Flowing screed (40 l)	-
Thin-bed mortar, cement for concrete precision blocks (30 l)	-
Creamy types of plaster (40 l)	-
Adhesive grouting compounds as backing for plaster (30 l)	-
Tile adhesives (25 l)	-
Pointing mortar (25 l)	-
Joint sealing compound (30 l)	-
2-component sealing grouting compounds (25 l)	-
Leveling compounds (25 l)	-
2-component epoxy-resin and sand mix (30 l)	-

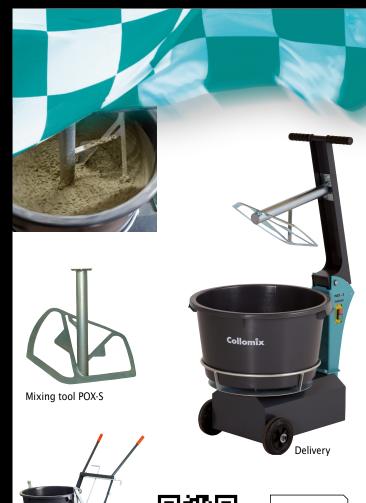

Accessory Troly





TECHNICAL DATA:

Mixing volume:	max. 40 litres
Size of mixing tub:	65 litres
Power rating of tube drive:	0,75 kW / 230 V
RPM of tube drive:	50 rpm
Weight:	48 kg
Dimensions:	60 x 82 x 77 cm

Item no. POX-S:	37.124
Item no. mixing tool	70.190
Accessory	
Item no. mixing tub 65 l:	60.403
Item no. trolly 65 l tube:	70.183

Your Collomix dealer:



Collomix GmbH Daimlerstraße 9 85080 Gaimersheim Germany

Tel: +49 8458 32 98 0

Fax: +49 8458 32 98 30 Epost:

Email: info@collomix.de bestilling@askmur.no Web: www.collomix.de



Collomix Norge: Askøy Murerverktøy AS Storebotn 65 5309 Kleppestø

Tel: +47 55 94 74 94

Web: www.askmur.no